

# NDE/NDG

Small chassis single dryer  
for semi-commercial laundry applications



## FEATURES

- Galvanized steel cylinder
- Top, front and side panels standard available in white
- Door opens 180° for easy loading and unloading
- Oversized lint filter located in front for easy cleaning
- Noiseless exhaust blower assures short drying times and low operating costs
- 5 drying programs

## OPTIONS

- Top, front and side panels in stainless steel
- Coin-operated version for vended laundry applications


OPTIONAL




# DIMENSIONS & SPECIFICATIONS

## SMALL CHASSIS SINGLE DRYER FOR SEMI-COMMERCIAL LAUNDRY APPLICATIONS

Model		NDE	NDG
Cylinder volume	l	198	198
Motor size	kW	0,25	0,25
Available heat sources		Electric	Gas
Gas inlet connection	mm	-	9,5
Gas consumption	BTU/hr	-	25.000
Exhaust outlet diameter	mm	102	102
Exhaust airflow	l/s	50Hz: 85 / 60 Hz: 105	50Hz: 85 / 60 Hz: 105
Cycle indicator lights		Yes	Yes
Cylinder finish		Galvanized	Galvanized
Available colors		Standard white Optional stainless steel	Standard white Optional stainless steel
Door type		Solid	Solid
Available electrical requirements		120/240/60/1 - 30A 120/208/60/1 - 30A 220/60/1 - 30A 230/50/1 - 30A 400/50/3 - 15A	120/60/1 - 15A 220/60/1 - 10A 230/50/1 - 10A
Dimensions (H x W x D)	mm	1027 x 683 x 711	1027 x 683 x 711
Net weight	kg	66	68
Transport data			
Bruto weight	kg	70	73
Shipping dimensions (H x W x D)	mm	1156 x 737 x 832	1156 x 737 x 832

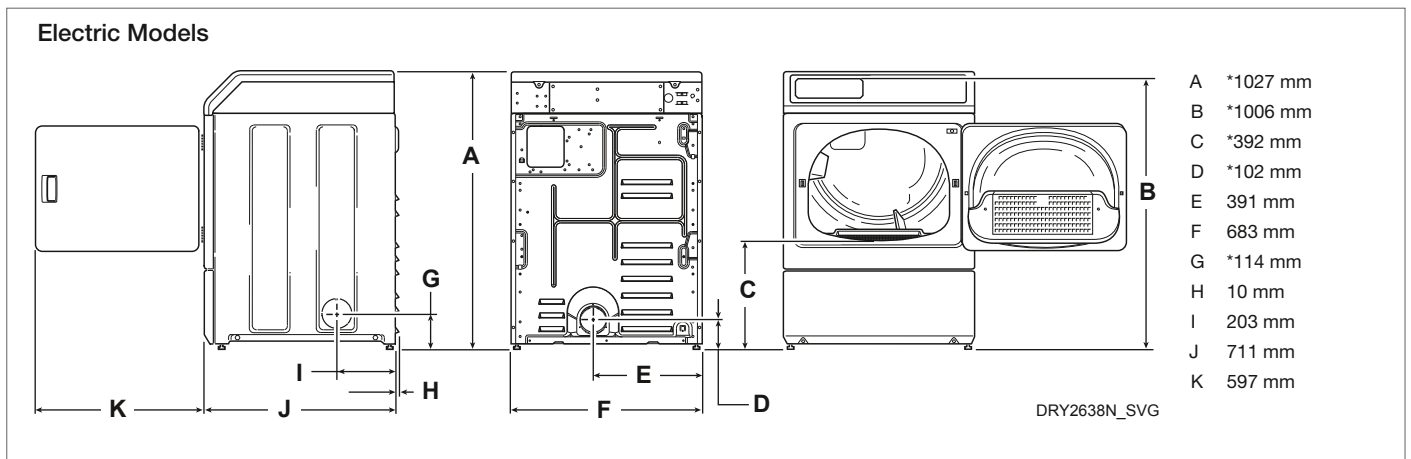

\* With leveling legs turned into base.

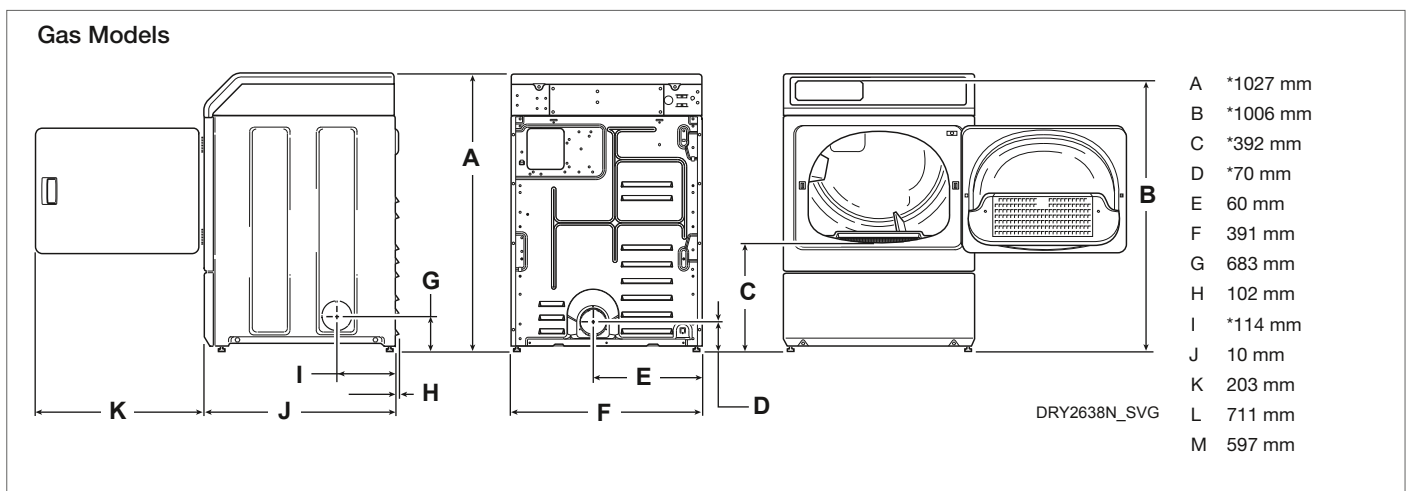

\* With leveling legs turned into base.